




Model **144823 Flat Window Jumper** is a rail-protected coaxial cable jumper assembly for use in door and window jams when drilling through walls is not permitted. The patent-pending rail system protects the precision teflon coaxial cable from deformation due to bending or repetitive impact within a window or door frame.

Features:

- **True Coaxial Cable:** 18 dB return loss @ 2150 MHz - Good to 3GHz
- **Electrical Specs Do Not Degrade With Bending, Impact, or Temp**
- **Higher Connector-Cable Holding Force:** Greater than 60 lbs
- **Thinner Cable:** Less than 3mm
- **High Center Conductor Holding F connectors:** Greater than 150g
- **Impact Durability:** 50,000 impacts (with no electrical degradation)
- **Shape Retention:** Employs a metal structure to hold sharper bends

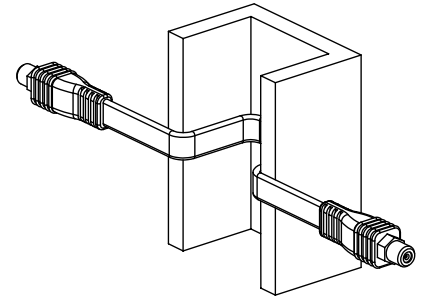

Model: 144823

Included:

- **Double-Sided Mounting Tape**
- **Clearance Measurement Tool**
- **Installation Instructions**


Frequency Range	5 MHz	2150 MHz	Temperature Range	-40C to +80C
Insertion Loss	0.2 dB	0.8 dB	Connector Holding Force	>60 lbs.
Return Loss	20 dB	18 dB	Coax Center Holding Force	>150g
DC Loop Resistance	0.3 ohms			

*specifications typical



Connector: Patented: 5,667,408
Blue Insulator: Trademarked by **HOLLAND Electronics**

INSERTION LOSS

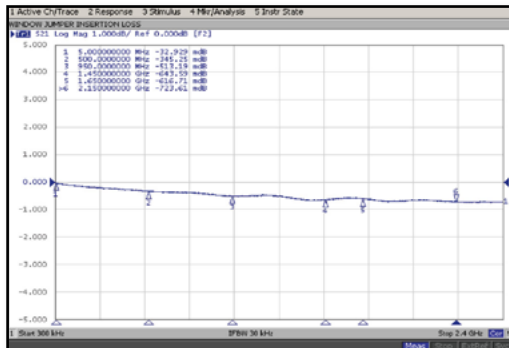

RETURN LOSS

