
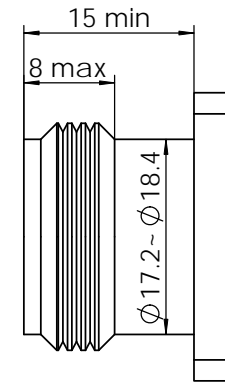


REVISIONS

REV	DESCRIPTION	DATE
1	Add note 6	2020.1.2

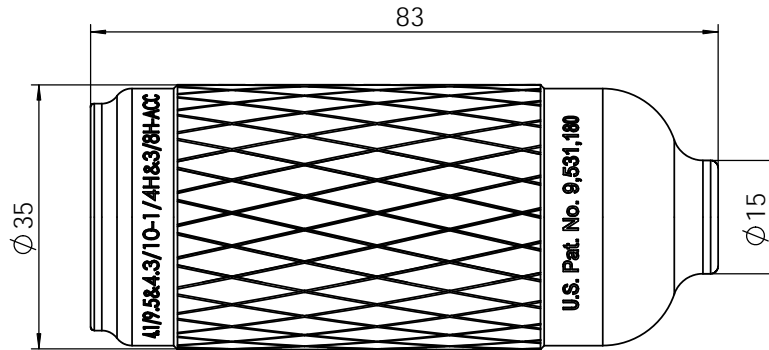

receptacle(female)
connector requirement

1. UV resistant (1120W/960 h)
2. Life: 10 years
3. Working temperature: -55 °C~+155 °C
4. Acid alkali resistant
5. Waterproofing standard IP68
6. This boot needs to be installed **before** cable jumper assembly.

DRAWN		TITLE		Amphenol		
CHECKED		WPS boot, 4.1/9.5 male & 4.3/10 male for 1/4" superflex and 3/8" superflex cable		AMPHENOL FUYANG CO.,LTD CHANGZHOU, CHINA		
APPROVED		SHEET	SCALE	METRIC	PART NO.	DRAWING NO.
		1/1	1.5/1	mm	AF2040678	AFS-2040678
				VER	REV	
				1	1	