


HOLLAND

Electronics LLC

RK-UNIV

INSTALLATION MANUAL

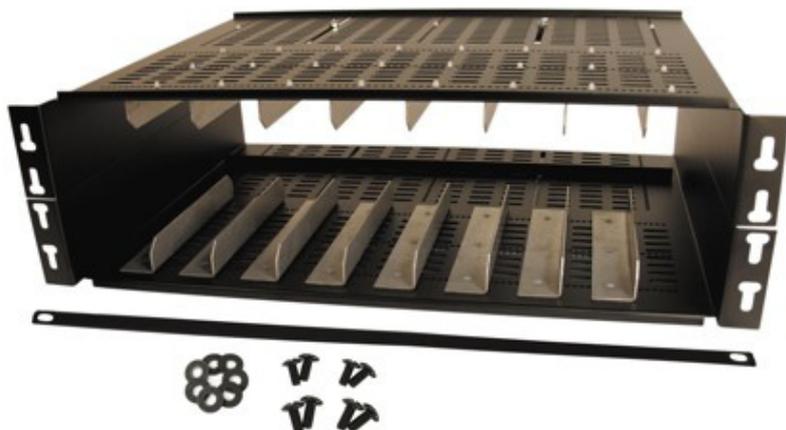

PARTS

- | | |
|-----------|---------------------------------|
| 1. 2pcs. | RK-UNIV receiver shelves |
| 2. 2pcs. | Rear retaining bracket |
| 3. 1pc. | Front retaining bar |
| 4. 18pcs. | Dividing brackets |
| 5. 8pcs. | Mounting screws |
| 6. 4pcs. | Nylon locking nuts |
| 7. 60pcs. | Snap pins |

TOOLS REQUIRED

- 5/16" Nut driver or wrench
- Philips Screwdriver

ASSEMBLY

Divider Spacing

1. Place one **RK-UNIV receiver shelf** down on a flat surface with the mounting tabs facing you.
2. Using one receiver as a guide, place the receiver on its side with the front of the unit facing you and place it against the mounting tab walls.



3. Place a **Dividing bracket** close to the receiver while still being able to align it and press one snap pin into a aligning hole, align the divider and press in the other two pins. Keep in mind to leave enough room for the feet of the receiver.
4. Now place the receiver against the divider that was just installed.
5. Continue step #3 for all the required dividers on that shelf.
6. See **Rear retaining bracket** installation.



7. Follow the same steps as in #1 through #6 to the second **RK-UNIV receiver shelf**, but start on the opposite side of the shelf as shown. This is so when the shelf is turned upside-down during mounting the divider spacing will line up properly.


Rear Retaining Bracket Placement

This step can be done after the rack has been mounted, but there will be situations that may require this step to be done before mounting.

1. When installing the **Rear retaining bracket**, line up the mounting studs on the bracket to the elongated holes that are located on the rear half of the shelf.
2. Place the bracket so the 90° bend in the bracket is closest to the rear of the unit being racked.



3. Keep in mind the front of the receiver should not extend passed the mounting tabs on the front of the shelf, as this is critical for proper mounting in the Head-End rack.
4. Slide the bracket up to the rear of the receiver. Make sure the bracket is properly aligned and press in the snap pins.

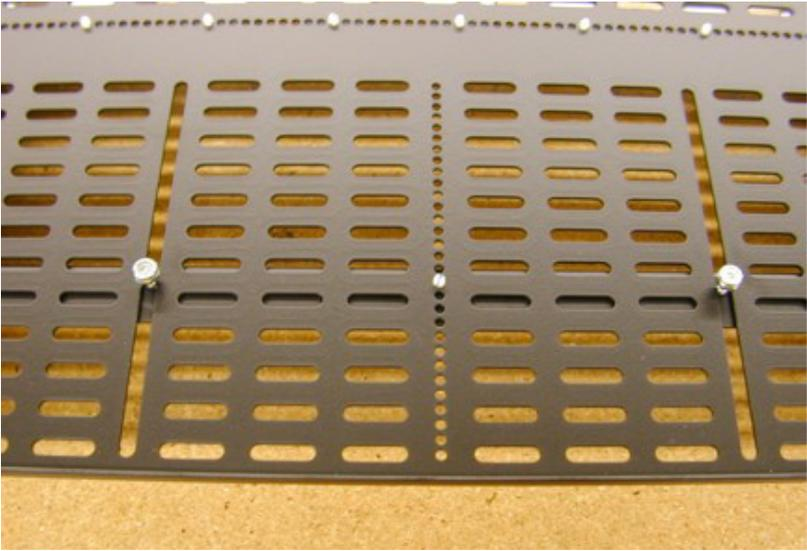

5. Once the pins are pressed in, turn the unit over and thread on the **Nylon Locking Nuts** as shown above until they are tight.
6. Repeat this process for the second shelf.

Mounting

1. Determine the amount of space that is required to mount the rack with units in the Head-end rack.
2. (One way this can be done is by putting 2 units in the bottom half of RK-UNIV while it is still sitting on a flat surface. Place one unit at each end of the RK-UNIV then place the top half of the shelf on top of the units and measure the distance from top to bottom.)
3. Mount the top and bottom in the proper manner in the Head-End rack within the required space using the **Mounting screws** provided.
4. Slide the units to be racked in the RK-UNIV.
5. Once the units are in the RK-UNIV. There are vertical holes on the mounting tabs for the users to micro adjust the spacing for a tight fit.
6. Mount the Front retaining bar with the Mounting screws provided. Be careful to properly place so it does not press on any buttons on the front of the unit being racked.

HOLLAND ELECTRONICS LLC LIMITED WARRANTY

Holland Electronics LLC warrants that the product enclosed with this Limited Warranty statement will conform to the manufacturer's specifications and be free of defects in the workmanship and material for a period of five years (5) from the date of original purchase.

WARRANTY PROCEDURE:

If the product appears to be defective contact Holland Electronics LLC. We will analyze the problem and offer solutions to prevent removing the unit from service. If no solution is found, and the unit must be returned for repair, you will be issued a Return Authorization (RA) number.

Holland Electronics LLC will, at its option, repair or replace the defective unit under warranty, without charge for parts or labor. This repair will be subject to charges if signs of tampering or misuse are detected. Incoming shipping costs will be the customer's responsibility. Returns will not be accepted without an RA number.

The warranty and remedy provided above are exclusive and in lieu of all other express warranties and unless stated herein, any statements or representations made by any other person or firm are void. The duration of any implied warranties of merchantability or fitness for a particular purpose on this product shall be limited to the duration of the warranty set forth above. Except as provided in this written warranty, Holland Electronics LLC shall not be liable for any loss, inconvenience, damage, including direct, special, incidental, or consequential damages, resulting from the use or inability to use this product, whether resulting from breach of warranty or any legal theory.

Some states do not allow limitations on how long an implied warranty lasts and some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation and exclusion may not apply to you.

The warranty gives you specific legal rights, and you may also have other rights, which vary from state to state.

To arrange for warranty service:

Call Holland Electronics LLC (805) 339-9060

Return Address with appropriate Return Authorization Number:
2935 Golf Course Drive Ventura, CA 93003